

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04L 29/06</b>	<b>A1</b>	(11) International Publication Number: <b>WO 99/21340</b> (43) International Publication Date: 29 April 1999 (29.04.99)
(21) International Application Number: PCT/US98/22073 (22) International Filing Date: 20 October 1998 (20.10.98) (30) Priority Data: 08/956,993 23 October 1997 (23.10.97) US (71) Applicant: AT & T WIRELESS SERVICES, INC. [US/US]; 5000 Carillon Point, Kirkland, WA 98033 (US). (72) Inventors: MARIA, Arturo; 2802-107th Avenue, N.E., Bellevue, WA 98004 (US). OWENS, Leslie, D.; 25712 S.E. 25th Way, Issaquah, WA 98029 (US). (74) Agents: DWORETSKY, Samuel, H. et al.; AT & T CORP., P.O. Box 4110, Middletown, NJ 07748 (US).		(81) Designated States: CA, JP, MX, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: A METHOD AND APPARATUS FOR FILTERING PACKETS USING A DEDICATED PROCESSOR

(57) Abstract

A dedicated data packet filtering processor whose only function is to filter data packets based on a list of source IP addresses stored in high-speed memory of the processor. The processor has a specialized operating system which controls the operation of the processor. The processor examines the source IP address of each received data packet or determine if the source IP address matches one of the stored source IP addresses, and if there is a match, either discards or forwards the data packet depending on the processor configuration. The list of source IP addresses are updated by a service provider having a central administrative site. The service provider keeps these lists up to date and periodically updates the source IP addresses stored in the random access memory of the dedicated IP filtering processors.

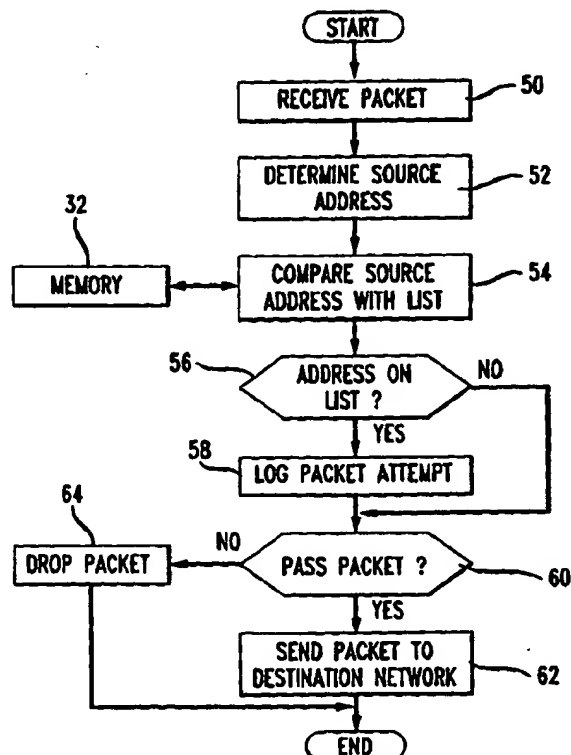

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

**A METHOD AND APPARATUS FOR FILTERING PACKETS USING A  
DEDICATED PROCESSOR**

FIELD OF THE INVENTION

5

The invention relates to packet filters in general. More particularly, the invention relates to a method and apparatus for filtering data packets using a dedicated processor and a list of source addresses stored in high-speed memory, as well as a means for periodically  
10 updating the list of source addresses to ensure the list is kept current.

BACKGROUND OF THE INVENTION

15

Many companies and individual homes have access to the Internet, and more particularly, the World Wide Web (WWW). With the growing number of Internet sites, there is also a growing number of sites which provide content  
20 that some companies may deem inappropriate for the workplace. Similarly, there are many Internet sites which provide content that parents may deem inappropriate for young children.

Data packet filters are currently available which  
25 filter out data packets from certain Internet sites. On the commercial side, these filters are often implemented as part of a router or "firewall." On the individual side, these filters are implemented as programs which

run on a personal computer and operate in conjunction with individual browser software. Both the commercial and individual filters operate by storing lists of prohibited source addresses, such as Internet Protocol (IP) addresses, and filtering out any data packets received from a site with a prohibited source IP address. One problem with the currently available filters is that there is a performance degradation as the list of prohibited source IP addresses grows.

Another problem is the administration of prohibited source IP address lists. Internet sites are being added and changed every day, and it is very difficult to keep a prohibited source IP address list up to date.

One example of a conventional data packet filter is described in United States Patent Number 5,606,668 titled "System for Securing Inbound and Outbound Data Packet Flow in a Computer Network." The `668 patent relates to computer network security and the control of information flow between internal and external network destinations. The patent broadly describes prior art packet filtering using access list tables. The patent is directed to a filter module which provides network security by specifying security rules for network traffic and accepting or dropping data packets according to the security rules. The rules are implemented in packet filter code which is executed by packet filter modules located at various locations within the network.

The packet filter disclosed in the `668 patent, however, is less than satisfactory for a number of reasons. In accordance with the disclosure of the `668 patent, the packet filter modules are embodied as "virtual machines" residing on existing network host computers. Thus, these filters are software modules executing on existing network computers, and are not separate dedicated filtering processors. Further, this patent fails to describe a method for administering and

updating the access list tables. In addition, the packet filter disclosed in the '668 patent is implemented between the data link layer and network layer of the International Standardization Organization (ISO) protocol stack as set forth in ISO standard 7498  
5 titled "Basic Reference Model for Open Systems Interconnection" (1984). Therefore, the packets must unnecessarily pass through the protocols set forth for the data link layer before being filtered, which slows  
10 down the processing speed of the packet filter.

Another example of a conventional data packet filter is shown in United States Patent Number 5,615,340 titled "Network Interfacing Apparatus and Method Using Repeater and Cascade Interface with Scrambling." The  
15 '340 patent relates to interfacing nodes in a network. Each node is associated with a plurality of working ports. When a node receives an incoming data packet, the destination address of the data packet is compared against a stored address table to determine if the data  
20 packet is destined for a working port associated with the node. The node will only transmit the data packet to the node's working ports if there is a match. Similarly, when a node receives an outgoing data packet, the destination address of the data packet is compared  
25 against the stored address table to determine if the data packet is destined for a working port associated with the node. If there is a match, then the node will transmit the data packet back to its working nodes. Otherwise, the node will transmit the data packet to the  
30 network. This system is not used for filtering unwanted data packets, but is instead used for network routing of data packets. Further, as with the '668 patent, the '340 patent fails to disclose a means for updating the source address list.

35 From the foregoing, it can be appreciated that a substantial needs exists for a high performance data

packet filter which can work with a large number of source IP addresses. There is also a need for an efficient way to administer source IP address lists.

5 SUMMARY OF THE INVENTION

One embodiment of the present invention proposes a dedicated data packet filtering processor whose only function is to filter data packets based on a list of  
10 source IP addresses stored in high-speed memory of the processor. The processor has a specialized operating system which controls the operation of the processor. The only function of the processor is to look at the source IP address of each received data packet to  
15 determine if the source IP address matches one of the stored source IP addresses, and if there is a match, to either discard or forward the data packet depending on the processor configuration. Since the processor is dedicated to one task, it can perform the filtering  
20 process very quickly and efficiently. In various embodiments, the filtering processor may be used in conjunction with a local area network and many end users (such as in a commercial or business environment), or a single end user computer (such as in a home  
25 environment). Further, the filtering processor may be connected to the Internet via wired connections or wireless connections, such as a fixed wireless network.

With these and other advantages and features of the invention that will become hereinafter apparent, the  
30 nature of the invention may be more clearly understood by reference to the following detailed description of the invention, the appended claims and to the several drawings attached herein.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 illustrates a network topology suitable for practicing one embodiment of the invention.

5 FIG. 2 is a block diagram of a packet filter processor in accordance with one embodiment of the invention.

FIG. 3 is a block flow diagram of steps for filtering data packets in accordance with one embodiment  
10 of the invention.

FIG. 4 is a block diagram of a list server in accordance with one embodiment of the invention.

DETAILED DESCRIPTION

15

Referring now in detail to the drawings wherein like parts are designated by like reference numerals throughout, there is illustrated in FIG. 1 a network topology suitable for practicing one embodiment of the  
20 invention. As shown in FIG. 1, a first network 10 is connected to a router 12. Router 12 is in turn connected to a packet filter processor 14. Packet filter processor 14 is connected to a second network 16 and an end-user terminal 18.

25 Networks 10 and 16 are packet based networks, such as Transmission Control Protocol/Internet Protocol (TCP/IP) networks or X.25 networks. A packet originates from network 10 with an intended destination to network 16 or end-user terminal 18. Both the source and  
30 destination addresses are included in the packet.

It is worthy to note that the network topology shown in FIG. 1 is exemplary only. The possible number of network configurations is virtually limitless, the design of which is well-known in the art. The present  
35 invention may work on any network configuration utilizing packet technology for transporting voice,

image or data signals.

The placement of packet filter processor 14 in a network is also variable depending on where a network designer would desire to control the in-flow or out-flow of packets between networks or network devices. In this embodiment of the invention, packet filter processor 14 is positioned at the only entry and exit point of either network 10 or 16, thereby controlling which packets enter either network. It can be appreciated, however, that packet filter processor 14 could be placed on an individual network device, such as a personal computer, thereby controlling the flow of packets only to the personal computer, or in any other strategic point within a network.

FIG. 2 is a block diagram of a packet filter processor in accordance with one embodiment of the invention. As shown in FIG. 2, Local Area Network (LAN) interface (I/F) connectors 20 and 48 are coupled to network interface cards 22 and 46, respectively. Connector 20 and card 22 are used to interface with network 10, and to accept packets originating from network 10. Connector 48 and card 46 are used to interface with network 16 or end-user terminal 18, and to accept packets originating from network 16 or terminal 18. Connectors 20 and 48, as well as cards 22 and 46, operate in accordance with principles well-known in the art.

Further, cards 22 and 46 are designed to adhere to the Institute of Electrical and Electronics Engineers (IEEE) standard titled "Carrier Sense Multiple Access with Collision Detection (CSMA/CD) Access Method and Physical Layer Specifications, American National Standard ANSI/IEEE Standard 802.3, 1985 ("IEEE 802.3 standard"). The IEEE 802.3 standard defines a technique referred to as CSMA/CD, which is appropriate for a network having a bus/tree topology. It can be



appreciated, however, that network interfaces designed to work with other medium access techniques or standards could be used for packet filter processor 14, and still fall within the scope of the invention.

5        Cards 22 and 44 are connected to one another, and also to First In First Out (FIFO) buffers 24 and 44, respectively. FIFO buffers 24 and 44 are used to store incoming or outgoing packets in memory until each packet can be compared and sent to networks 10 or 16.

10        Packet filter processor 14 also includes several types of high-speed memory. By way of example, this embodiment of the invention includes a 96 kilobyte (K) Programmable Read Only Memory (PROM) 40, a 32K Non-Volatile Random Access Memory (NVRAM) 42, and a Dynamic  
15 Random Access Memory (DRAM) bank 32. There is also a DRAM control 30 for DRAM bank 32.

Each type of memory is used to store data for packet filter processor 14. For example, PROM 40 is used to store an operating system 39 for packet filter  
20 processor 14. NVRAM 42 is used to store user defined parameters 45, and operating system parameters 43 used by the operating system stored in PROM 40. DRAM bank 32 is used to store an address list 33 of source IP addresses.

25        The heart of packet filter processor 38 is a dedicated high performance microprocessor 38. Any microprocessor capable of operating at the speeds necessary to implement of the functions of the packet filter processor is appropriate. Examples of processors  
30 suitable to practice the invention includes the INTEL family of processors, such as the Pentium®, Pentium® Pro, and Pentium® II microprocessors.

Packet filter processor 14 also includes a connector 34 and interface 36, both of which are  
35 attached to processor 38. Connector 34 and interface 36 both adhere to Electronic Industries Association (EIA)

Standard RS-232-C titled "Interface Between Data Terminal Equipment and Data Communication Equipment Employing Serial Binary Data Interexchange," October, 1969.

Finally, packet filter processor 14 includes a clock 26  
5 and clock counter 28 to control the timing of packet filter processor 14.

Packet filter processor 14 operates in accordance with operating system 39, which is comprised of a set of computer program instructions which are stored in PROM  
10 40. Since a list of source IP addresses can include a large number of addresses, e.g., ranging from hundreds to several thousand, the processing time required to compare a source IP address of an incoming packet with a list of several thousand source IP addresses is  
15 enormous, and significantly degrades the performance of many conventional packet filters. According to the principles of the present invention, however, packet filter processor 14 combines the elements of a high-speed microprocessor, a source IP address list stored in  
20 high-speed memory, and a dedicated proprietary operating system, to ensure that data packets can be filtered at a high-rate of speed.

Operating system 39 is designed to control the operation of the processor. More particularly,  
25 operating system 39 is designed such that the processor is directed to look at the source IP address of each received data packet to determine if the source IP address matches one of the stored source IP addresses, and if there is a match, to either discard or forward  
30 the data packet depending on the processor configuration. Since operating system 39 and processor 38 are dedicated to one task, packet filter processor 14 can perform the filtering process very quickly and efficiently. The operation of operating system 39, and  
35 of packet filter processor 14 in general, will be described in more detail with reference to FIG. 3.

Another reason packet filter processor 14 is so efficient is that packet filter processor 14 is implemented between the physical layer and data link layer of the ISO 7498 protocol stack. The significance of this implementation can be better appreciated in view of some background information of network architectures in general.

A network architecture defines protocols, message formats, and standards to which products must conform in order to connect properly with the network. Architectures are developed by standards organizations, common carriers, and a computer and network vendors. Network architectures use a layered approach, whereby functions are organized into groups and assigned to specific functional layers in the architecture. Network architectures define the interfaces between layers in a given network node and within the same layer in two different nodes.

OSI provides a generalized model of system interconnection. It encompasses seven layers: application, presentation, session, transport, network, data link, and physical. A brief summary for each layer is given as follows:

1. Physical Layer - The physical layer is responsible for the transmission of bit stream across a particular physical transmission medium. It involves a connection between two machines that allows electrical signals to be exchanged between them.
2. Data Link Layer - The data link layer is responsible for providing reliable data transmission from one node to another and for shielding higher layers from any concerns about the physical transmission medium. It is concerned with

the error free transmission of frames of data.

3. Network Layer - The network layer is concerned with routing data from one network node to another. It is responsible for establishing, maintaining, and terminating the network connection between two users and for transferring data along that connection.
  4. Transport Layer - The transport layer is responsible for providing data transfer between two users at an agreed on level of quality.
  5. Session Layer - The session layer focuses on providing services used to organize and synchronize the dialog that takes place between users and to manage data exchange.
  6. Presentation Layer - The presentation layer is responsible for the presentation of information in a way that is meaningful to the network users, e.g., character code translation, data conversion, or data compression or expansion.
  7. Application Layer - The application layer provides a means for application processes to access the system interconnection facilities in order to exchange information.
- Packet filter processor 14 is implemented between the physical layer and data link layers described above, in order to increase the speed at which packets are filtered. The physical layer is responsible for data encoding and decoding. Data encoding refers to translating the bits being transmitted into the proper electrical signals to be sent across the transmission

medium. Data decoding translates the electrical signals received over the transmission medium into the bit stream those signals represent. The data link layer is concerned with data encapsulation/decapsulation and  
5 media access management. These functions, however, are not necessary for identifying the source address of the packet. For example, data decapsulation is the function of recognizing the destination address, determining if it matches the receiving station's address, performing  
10 error checking, and removing control information that was added by the data encapsulation function in the sending station. Therefore, by implementing packet filter processor 14 between the physical layer and data link layer, processor 14 can maximize the speed at which  
15 it filters each packet.

FIG. 3 illustrates a block flow diagram of steps for filtering data packets in accordance with one embodiment of the invention. The description with respect to FIG. 3 will assume that a packet is  
20 originating from network 10 and has an intended destination address that is within network 16. It can be appreciated, however, that the operation of packet filter processor 14 is identical when the packet originates from network 16 or terminal 18 and has an  
25 intended destination address within network 10.

Packet filter processor 14 receives a packet at step 50. Connector 20 receives the packet and passes the packet to interface card 22 which is designed to convert the electrical impulses received over the  
30 physical transmission media into packets conforming to the standards set forth in IEEE 802.3. The packet is stored in FIFO 24.

Processor 38 reads the source IP address for the packet at step 52, and compares the source IP address  
35 with list 33, which is stored in DRAM bank 32, at step 54. List 33 is stored in DRAM bank 32 in order to

increase the speed at which data from the list could be retrieved by processor 38, as compared to, e.g., when data is stored on some other computer readable medium such as a hard drive or floppy disk. Step 56 comprises  
5 a test to determine whether there is a match at step 54. If there is a match at step 54, then packet filter processor 58 records the attempt at step 58 before passing control to step 60. If there is not a match at step 54, then control is directly passed to step 60.

10 Packet filter processor 14 determines whether the packet should be passed at step 60. The decision whether to pass the packet or not is dependent upon the mode in which processor 14 is currently configured. Packet filter processor 14 has a restrictive mode and a  
15 permissive mode. Restrictive mode refers to a condition where a select number of packets are to be passed, and all others blocked. Permissive mode is where all packets are to be passed except for a select few that require blocking. Thus, in permissive mode, the packet  
20 is passed if the source IP address for a packet does not match an address on list 33. If there is a match, packet filter processor 14 drops the packet. In restrictive mode, the packet is passed if the source IP address does match an address from list 33, and is  
25 dropped otherwise.

At step 60, packet filter processor 14 determines whether the packet should be passed depending on whether processor 14 has been set to permissive mode or restrictive mode. If processor 14 has been set to  
30 restrictive mode, and there is a match at step 56, then the packet is passed at step 62 to the destination network which in this embodiment of the invention is network 16 or terminal 18. If processor 14 has been set to restrictive mode, and there is not a match at step  
35 56, then the packet is dropped at step 64. Conversely, if processor 14 has been set to permissive mode, and

there is a match at step 56, then the packet is dropped at step 64. If processor 14 has been set to permissive mode, and there is not a match at step 56, then the packet is passed to the destination network at step 62.

5 In this embodiment of the invention, a default condition is that no feedback is given to the system sending the packets for security reasons if a packet is dropped at step 64. It can be appreciated, however, that this default condition can be changed and still fall within  
10 the scope of the invention.

In accordance with the system administration aspects of the invention, a service provider administers a database of source IP address lists. Each list may contain the IP addresses of particular types of Internet  
15 sites. The service provider keeps these lists up to date and periodically updates list 33 stored in DRAM bank 32 of packet filter processor 14. In this manner, end users can be assured that the source IP address lists stored in their filtering processor are up to  
20 date.

List 33 can be updated in at least two ways. First, list 33 could be updated by connecting Data Terminal Equipment (DTE) such as an asynchronous (ASCII) terminal (or personal computer emulating an asynchronous  
25 terminal) to RS-232 connector 34 of packet filter processor 14. This method would enhance security when updating list 33.

Alternatively, a network connection is formed with a central administrative site equipped with a list  
30 server 70, preferably through an Internet Service Provider (ISP) using a direct network connection or via RS-232 connector 34. List 33 is then updated from the central administrative site, either by a request by the list server 70 of the administrative site, or on the  
35 request of packet filter processor 14. List server 70 is described in more detail with reference to FIG. 4.

FIG. 4 is a block diagram of a list server suitable for practicing one embodiment of the invention. List server 70 comprises a main memory module 72, a central processing unit (CPU) 74, a system control module 82, a bus adapter 76, a list replication module 78, and a user interface module 80, each of which is connected to a CPU/memory bus 84 and an Input/Output (I/O) bus 86 via bus adapter 76. Further, list server 70 contains multiple I/O controllers 88, as well as an external memory 90, a database 92 and network interface 94, each of which is connected to I/O bus 86 via I/O controllers 88.

The overall functioning of list server 70 is controlled by CPU 74, which operates under the control of executed computer program instructions that are stored in main memory 72 or external memory 90. Both main memory 72 and external memory 90 are machine readable storage devices. The difference between main memory 72 and external memory 90 is that CPU 74 can typically access information stored in main memory 72 faster than information stored in external memory 90. Thus, for example, main memory 72 may be any type of machine readable storage device, such as random access memory (RAM), read only memory (ROM), programmable read only memory (PROM), erasable programmable read only memory (EPROM), electronically erasable programmable read only memory (EEPROM). External memory 90 may be any type of machine readable storage device, such as magnetic storage media (i.e., a magnetic disk), or optical storage media (i.e., a CD-ROM). Further, list server 70 may contain various combinations of machine readable storage devices through other I/O controllers, which are accessible by CPU 74, and which are capable of storing a combination of computer program instructions and data.

CPU 74 includes any processor of sufficient



processing power to perform the functionality found in list server 70. Examples of CPUs suitable to practice the invention includes the INTEL family of processors, such as the Pentium®, Pentium® Pro, and Pentium® II microprocessors.

Network interface 94 is used for communications between list server 70 and a communications network, such as the Public Switched Telephone Network (PSTN) or the Internet. Network interface 94 supports appropriate signaling, ringing functions and voltage levels, in accordance with techniques well known in the art.

I/O controllers 88 are used to control the flow of information between list server 70 and a number of devices or networks such as external memory 90, database 92 and network interface 94. System control module 82 includes human user system control and operation. Bus adapter 76 is used for transferring data back and forth between CPU/memory bus 84 and I/O bus 86.

List replication module 78 and user interface module 80 implements the main functionality for list server 70. It is noted that modules 78 and 80 are shown as separate functional modules in FIG. 4. It can be appreciated, however, that the functions performed by these modules can be further separated into more modules, combined together to form one module, or be distributed throughout the system, and still fall within the scope of the invention. Further, the functionality of these modules may be implemented in hardware, software, or a combination of hardware and software, using well-known signal processing techniques.

List server 70 operates as follows. A profile is established for each packet filter processor customer subscribing to the list updating service. The profile contains a copy of list 33 for each packet filter processor. List 33 at list server 70 is updated with new source IP addresses on a periodic basis. Similarly,

old or invalid source IP addresses are removed from list 33 on a periodic basis.

The updating of list 33 at list server 70 can be accomplished in two ways. First, the central administrator for list server 70 obtains new source IP address information from various sources, such as service providers or search robots specializing in gathering source IP addresses by category, e.g., telemarketers, adult material, advertising entities, hate groups, and so forth. The central administrator for list server 70 then updates list 33 at list server 70 with the new source IP address information in a timely manner, e.g., within hours of receiving the new information. Second, the user of a packet filter processor can access list server 70 via user interface module 80, and perform updates to list 33 at list server 70 directly. The user could update list server 70 in a variety of ways, such as adding, deleting or modifying the source IP addresses of list 33 stored in database 92 of list server 70.

Once list 33 at list server 70 is updated, list replication module sends updated list 33 to each packet filter processor according to the profile of each packet filter processor. The profile for each packet filter processor contains information regarding when and how often list 33 at list server 70 is to be replicated to the packet filter processor. For example, list 33 at list server 70 can be replicated to a packet filter processor on a periodic basis, such as every day at a certain time, or whenever a change to list 33 at list server 70 is performed. In addition, a user of a packet filter processor may request an update of list 33, such as when the user has modified list 33 at server 70, or in the event list 33 at the packet filter processor has become corrupted or lost.

In addition to updating existing lists for packet

filter processors, list server 70 has predetermined lists of source IP addresses by category. For example, a list of source IP addresses for all Internet sites containing adult material can be pre-established, and  
5 therefore readily replicated to a packet filter processor by a user simply accessing the central administrative site and making a request. Other lists for telemarketing firms, non-business related web sites, a competitor's network devices, government web sites,  
10 and so forth, could also be pre-established and made available for a user of the packet filter processor.

Although various embodiments are specifically illustrated and described herein, it will be appreciated that modifications and variations of the present  
15 invention are covered by the above teachings and within the purview of the appended claims without departing from the spirit and intended scope of the invention. For example, although a specific network topology has been illustrated in FIG. 1, it can be appreciated that  
20 any type of network configuration would be suitable for practicing the various embodiments of the present invention. In another example, although specific equipment was illustrated in FIG. 2 for a particular type of medium access technique, it can be appreciated  
25 that the packet filter processor shown in FIG. 2 can be modified to include equipment for any type of medium access technique, such as IEEE 802.2, 802.4, 802.5, 802.12 and so forth, and still fall within the scope of the invention.

What is claimed is:

- 1 1. An apparatus for filtering packets sent from a  
2 first network to a second network, comprising:  
3 an input means coupled to said first network for  
4 receiving data packets from the first network, said data  
5 packets having an origination address;  
6 a first buffer coupled to said input means for  
7 storing said received packet;  
8 a first memory segment containing a list of  
9 origination addresses;  
10 a second memory segment for storing a program for  
11 comparing origination addresses for said received data  
12 packets with said list;  
13 a processor coupled to said first buffer, said  
14 first memory segment and said second memory segment for  
15 executing said program; and  
16 an output means coupled to said first buffer for  
17 forwarding said compared data packets to the second  
18 network based on said comparison.
- 1 2. The apparatus of claim 1, further comprising a  
2 second buffer for storing said compared data packets  
3 prior to forwarding said compared data packets to the  
4 second network.
- 1 3. The apparatus of claim 2, wherein said random  
2 access memory comprises dynamic random access memory.
- 1 4. The apparatus of claim 3, further comprising a non-  
2 volatile random access memory for storing parameters  
3 used by said operating system program.
- 1 5. The apparatus of claim 4, further comprising means  
2 for receiving an updated list of origination addresses.

1 6. The apparatus of claim 5, wherein said means for  
2 receiving comprises an asynchronous terminal device and  
3 a serial port coupled to said dynamic random access  
4 memory.

1 7. The apparatus of claim 5, wherein said means for  
2 receiving comprises a network interface card coupled to  
3 said dynamic random access memory.

1 8. The apparatus of claim 1, wherein said first  
2 network is a fixed wireless network, and said input  
3 means comprises means for receiving said data packets  
4 from said fixed wireless network.


1 9. The apparatus of claim 1, wherein said output means  
2 comprises means for forwarding data packets to a single  
3 end user terminal.

1 10. The apparatus of claim 1, wherein said second  
2 network is a local area network, and said output means  
3 comprises means for forwarding data packets to a said  
4 local area network.

1 11. An apparatus for filtering packets sent from a  
2 first network to a device, comprising:  
3 an input means coupled to said first network for  
4 receiving data packets from the first network, said data  
5 packets having an origination address;  
6 a first buffer coupled to said input means for  
7 storing said received packet;  
8 a first memory segment containing a list of  
9 origination addresses;  
10 a second memory segment for storing a program for  
11 comparing origination addresses for said received data  
12 packets with said list;  
13 a processor coupled to said first buffer, said  
14 first memory segment and said second memory segment for  
15 executing said program; and  
16 an output means coupled to said first buffer for  
17 forwarding said compared data packets to the device  
18 based on said comparison.


1/4

FIG. 1

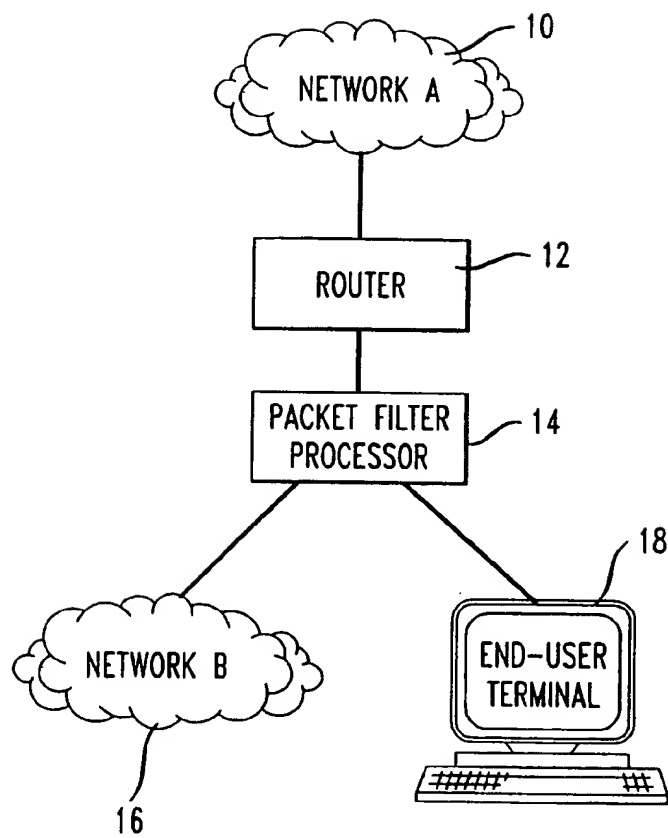

2/4


FIG. 2

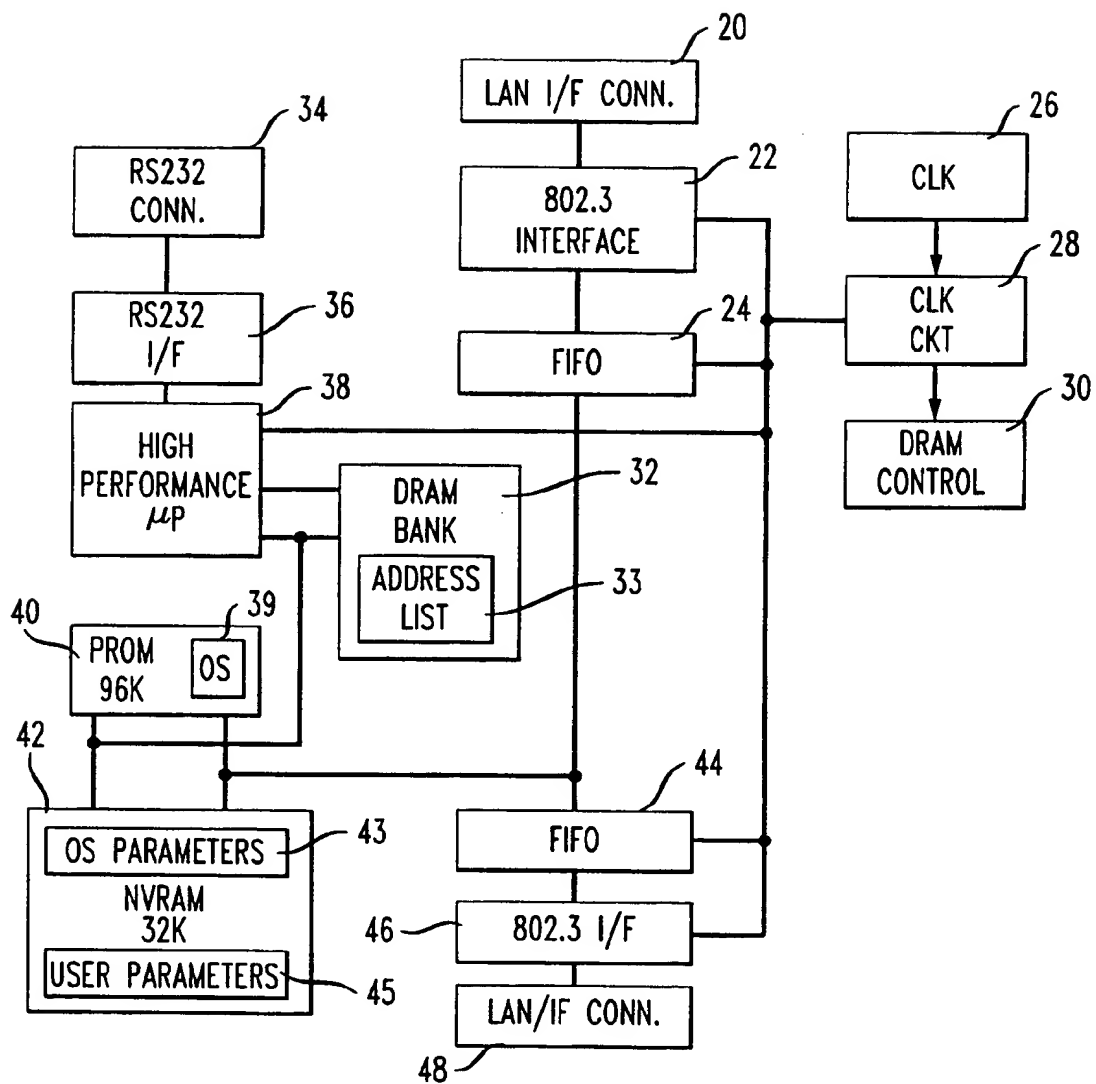




3/4

FIG. 3

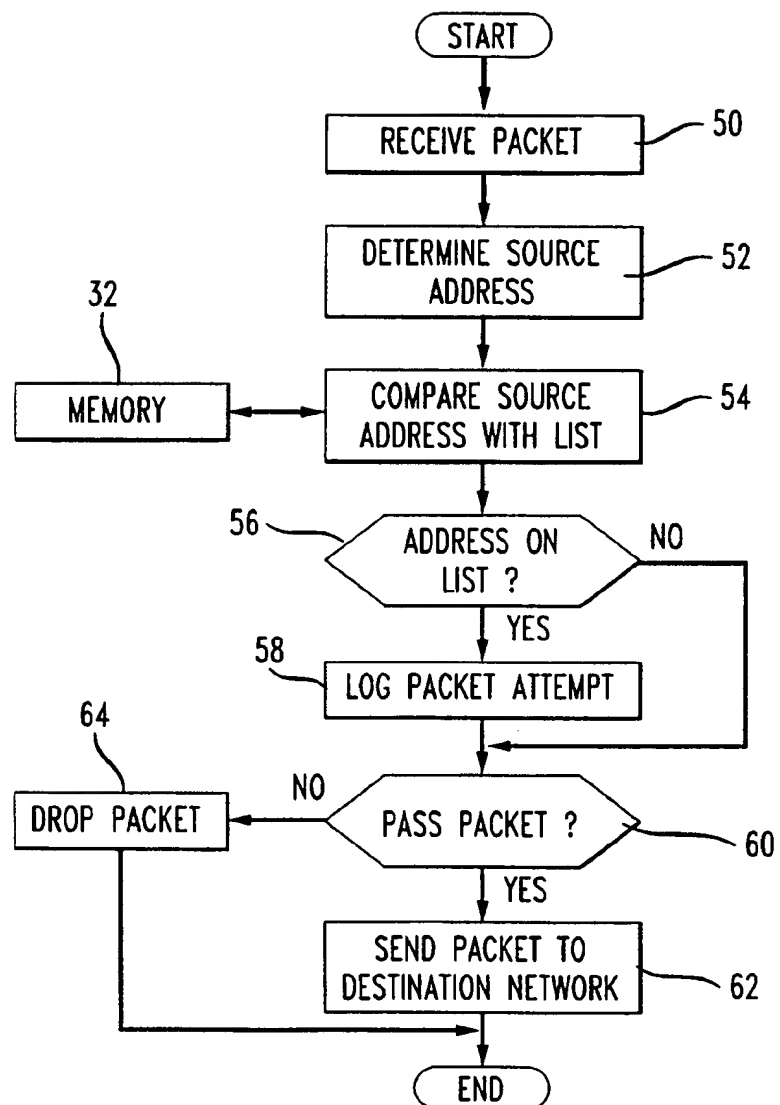

4/4

FIG. 4

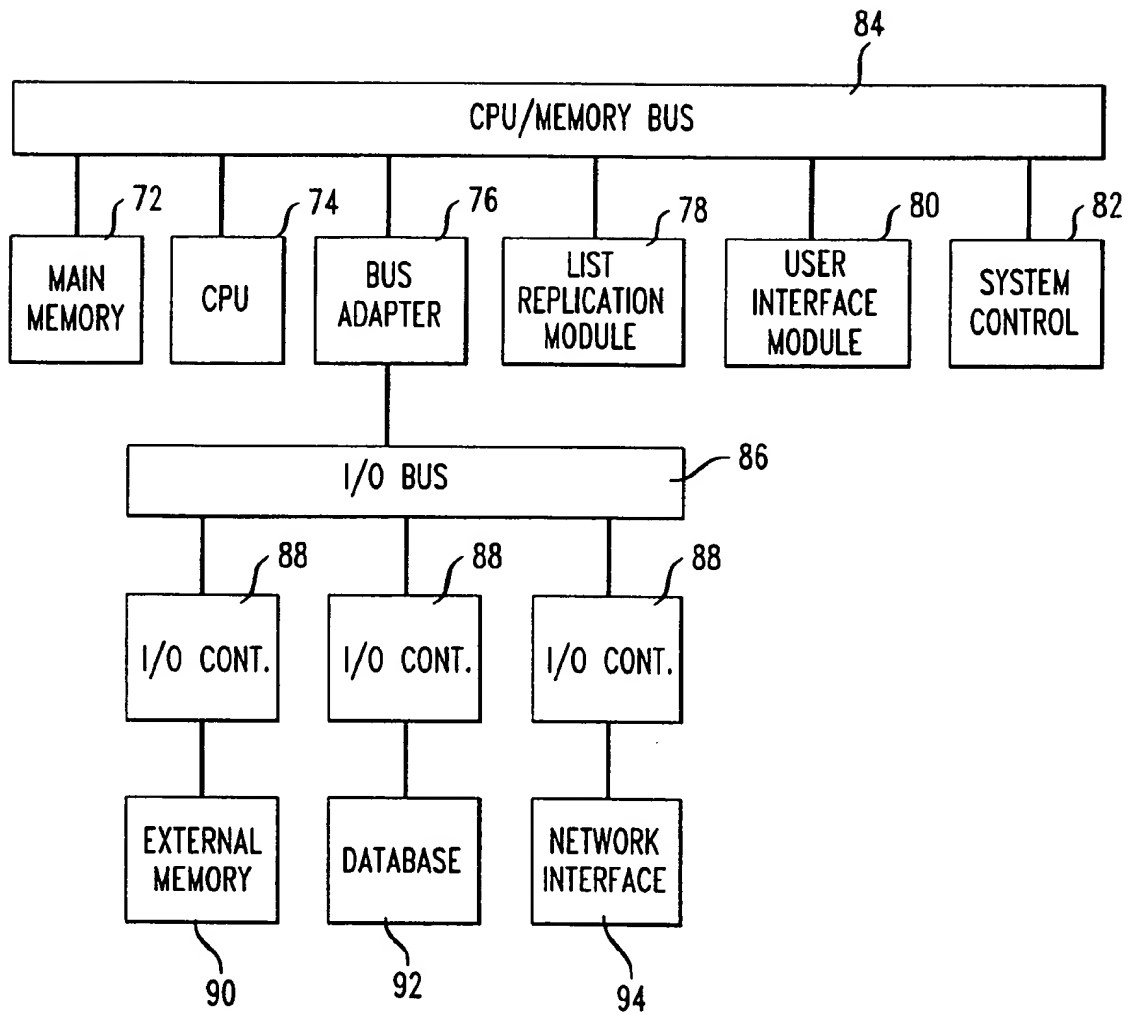

# INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 98/22073

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 6 H04L29/06

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 715 030 A (KOCH STEVEN R ET AL) 22 December 1987 see column 5, line 13 - column 6, line 19 see column 8, line 25 - line 59	1-5,8-11
Y	---	6
Y	PATENT ABSTRACTS OF JAPAN vol. 097, no. 010, 31 October 1997 & JP 09 152969 A (KENWOOD CORP), 10 June 1997 see abstract	6
Y	---	
Y	US 5 615 340 A (DAI WEI W ET AL) 25 March 1997 cited in the application see column 5, line 56 - column 8, line 15; figure 4	1-5,7-11
	---	
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

15 February 1999

Date of mailing of the international search report

10/03/1999

Name and mailing address of the ISA  
European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Ströbeck, A

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 98/22073

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 743 777 A (SUN MICROSYSTEMS INC) 20 November 1996 see column 4, line 40 - line 48 see column 5, line 56 - column 6, line 19 see column 7, line 25 - column 8, line 17; figures 8,9 ---	1-5,7-11
A	SKOKOWSKI P: "PENNY-PINCHING NETWORKS FOR DISTRIBUTED CONTROL" CONTROL ENGINEERING, vol. 39, no. 5, 1 January 1992, pages 35-37, XP000296074 see page 36, left-hand column, line 27 - page 37, right-hand column, line 17 ---	3,4
A	ANDREW S. TANENBAUM: "Computer Networks" 1996, PRENTICE-HALL INTERNATIONAL, UPPER SADDLE RIVER, NEW JERSEY, US XP002092192 see page 13, paragraph 1.2.4. see figure 1.7 ---	8
A	WO 96 13113 A (SECURE COMPUTING CORPORATION) 2 May 1996 see page 12, line 18 - line 27; figure 2 ---	9,11
A	US 5 606 668 A (SHWED GIL) 25 February 1997 cited in the application see abstract -----	1,11

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 98/22073

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4715030 A	22-12-1987	NONE	
US 5615340 A	25-03-1997	AU 3143295 A EP 0771500 A JP 10503900 T WO 9603822 A US 5751952 A	22-02-1996 07-05-1997 07-04-1998 08-02-1996 12-05-1998
EP 0743777 A	20-11-1996	US 5802320 A JP 9224053 A	01-09-1998 26-08-1997
WO 9613113 A	02-05-1996	US 5864683 A AU 3888595 A EP 0787397 A	26-01-1999 15-05-1996 06-08-1997
US 5606668 A	25-02-1997	CA 2138058 A EP 0658837 A WO 9700471 A JP 8044642 A US 5835726 A	16-06-1995 21-06-1995 03-01-1997 16-02-1996 10-11-1998